



RECOMMENDED P.C.B. LAYOUT
UNSPECIFIED TOLERANCE: ±0.05
(COPPER-TOP VIEW)

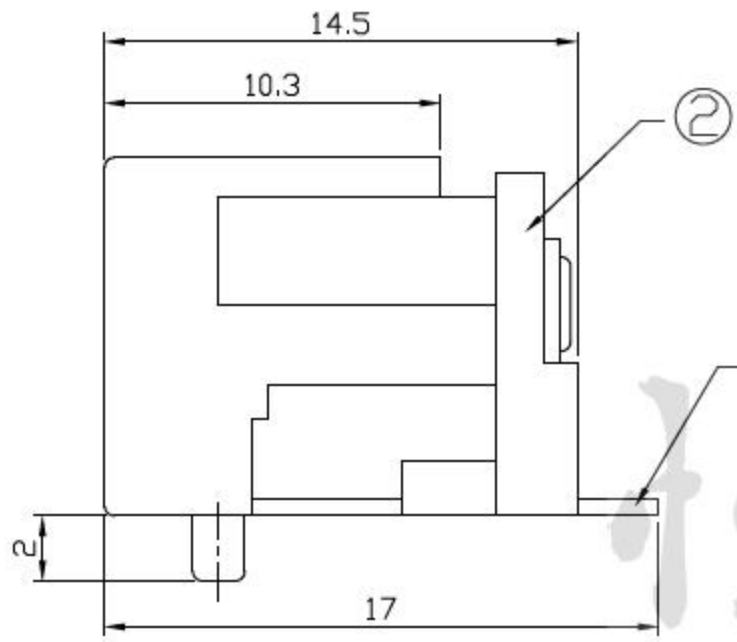

DC MATE PLUG



Model No.	H	J
CENTER PIN	φ2.0	φ2.5

- SPECIFICATION
1. Rating : DC 20V 5A ;
 2. Contact resistance : ≤30mΩ ;
After test : ≤50mΩ
 3. Insulation resistance : ≥100MΩ (DC500V) ;
After test : ≥50MΩ
 4. Withstanding voltage : 500VAC ;
 5. Insertion and extraction force : 3-30N ;
 6. Life test : 5,000 cycles ;
 7. Operation temperature range : -20°C ~ 70°C ;
 8. Preservative temperature range : -40°C ~ 85°C ;

设计:	Arvin: 2016.03.08	范围 Range	公差 Tolerance
审核:	Arvin:	X.X ±	X.X ±0.30
校对:	Ru yi:	X.XX ±	X.XX ±0.20
比例:	视角关系:	X.XXX ±	X.XXX ±0.10
版次:	图框大小: A4	Angle ±	Angle ±5°

东莞市恒祺电子科技有限公司

名称: DC插座 型号: DC-088

料号:
共 张 , 第 张 备注: